Core: ATI 3D Rage IIC PCI ?MHz 64bit
Memory: 4MB SDRAM ?MHz ?bit
Year: 2000 **Bus:** PCI
Made: Taiwan **Links:** Linuxmanual HP info

Bios: here
Note: remote control card for Compaq ProLiant servers. With external power adapter (optional, works without it) can work even with powered down server. Card has raid type bios (loads at boot before os), where can be set lan parameters, user names, passwords and management rights.

{webgallery}

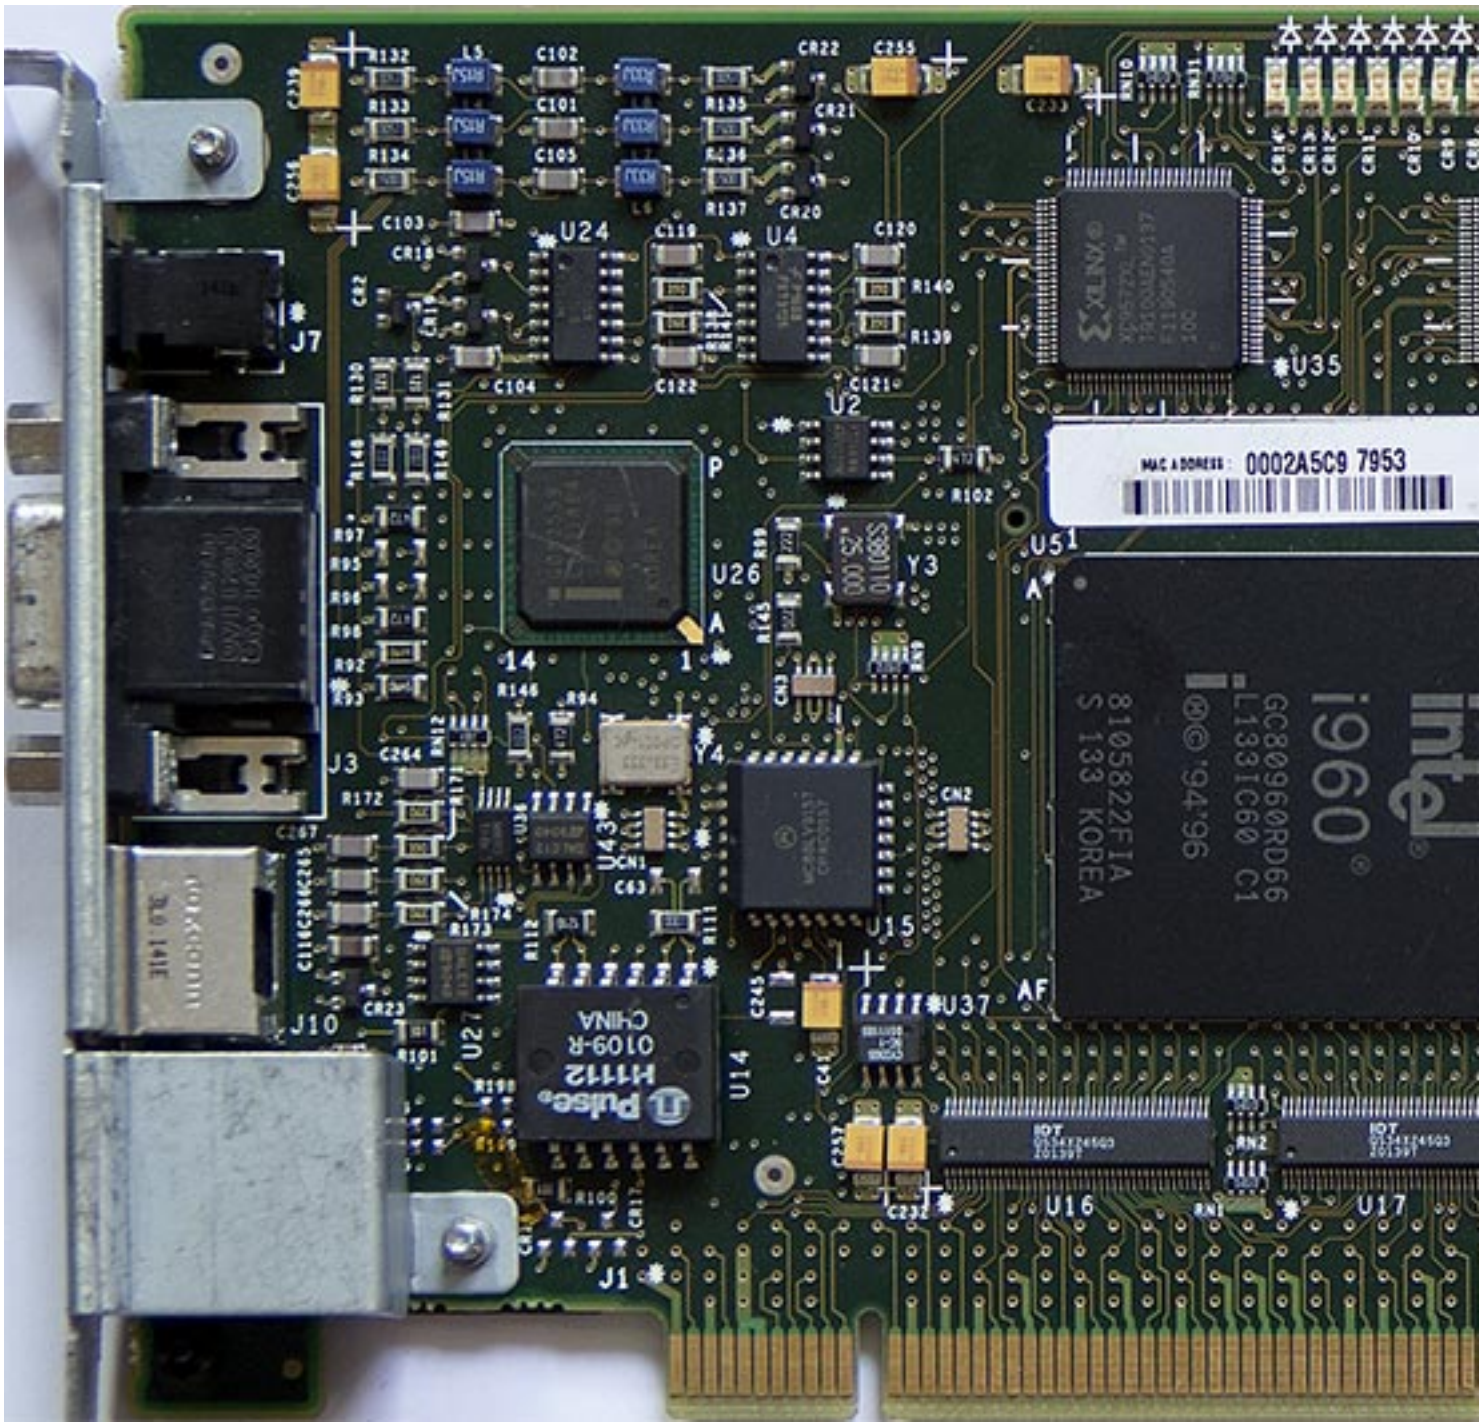
MAC ADDRESS: 0002A5C9 7953
intel
i960
GC80960RD66
L133IC60 C1
©'94'96
8105822FIA
S 133 KOREA
Pulse
H1112
0109-R
CHINA
U24
U4
U2
U35
U51
U26
U15
U37
U14
U16
U17
J7
J10
J1
Y3
Y4

Agency Series EVB002
Complies with Canadian ICES-003, Class B.
FC CE
N119
Tested To Comply With FCC Standards
FOR HOME OR OFFICE USE
222629-001
www.vgamuseum.info
POWER
VIDEO

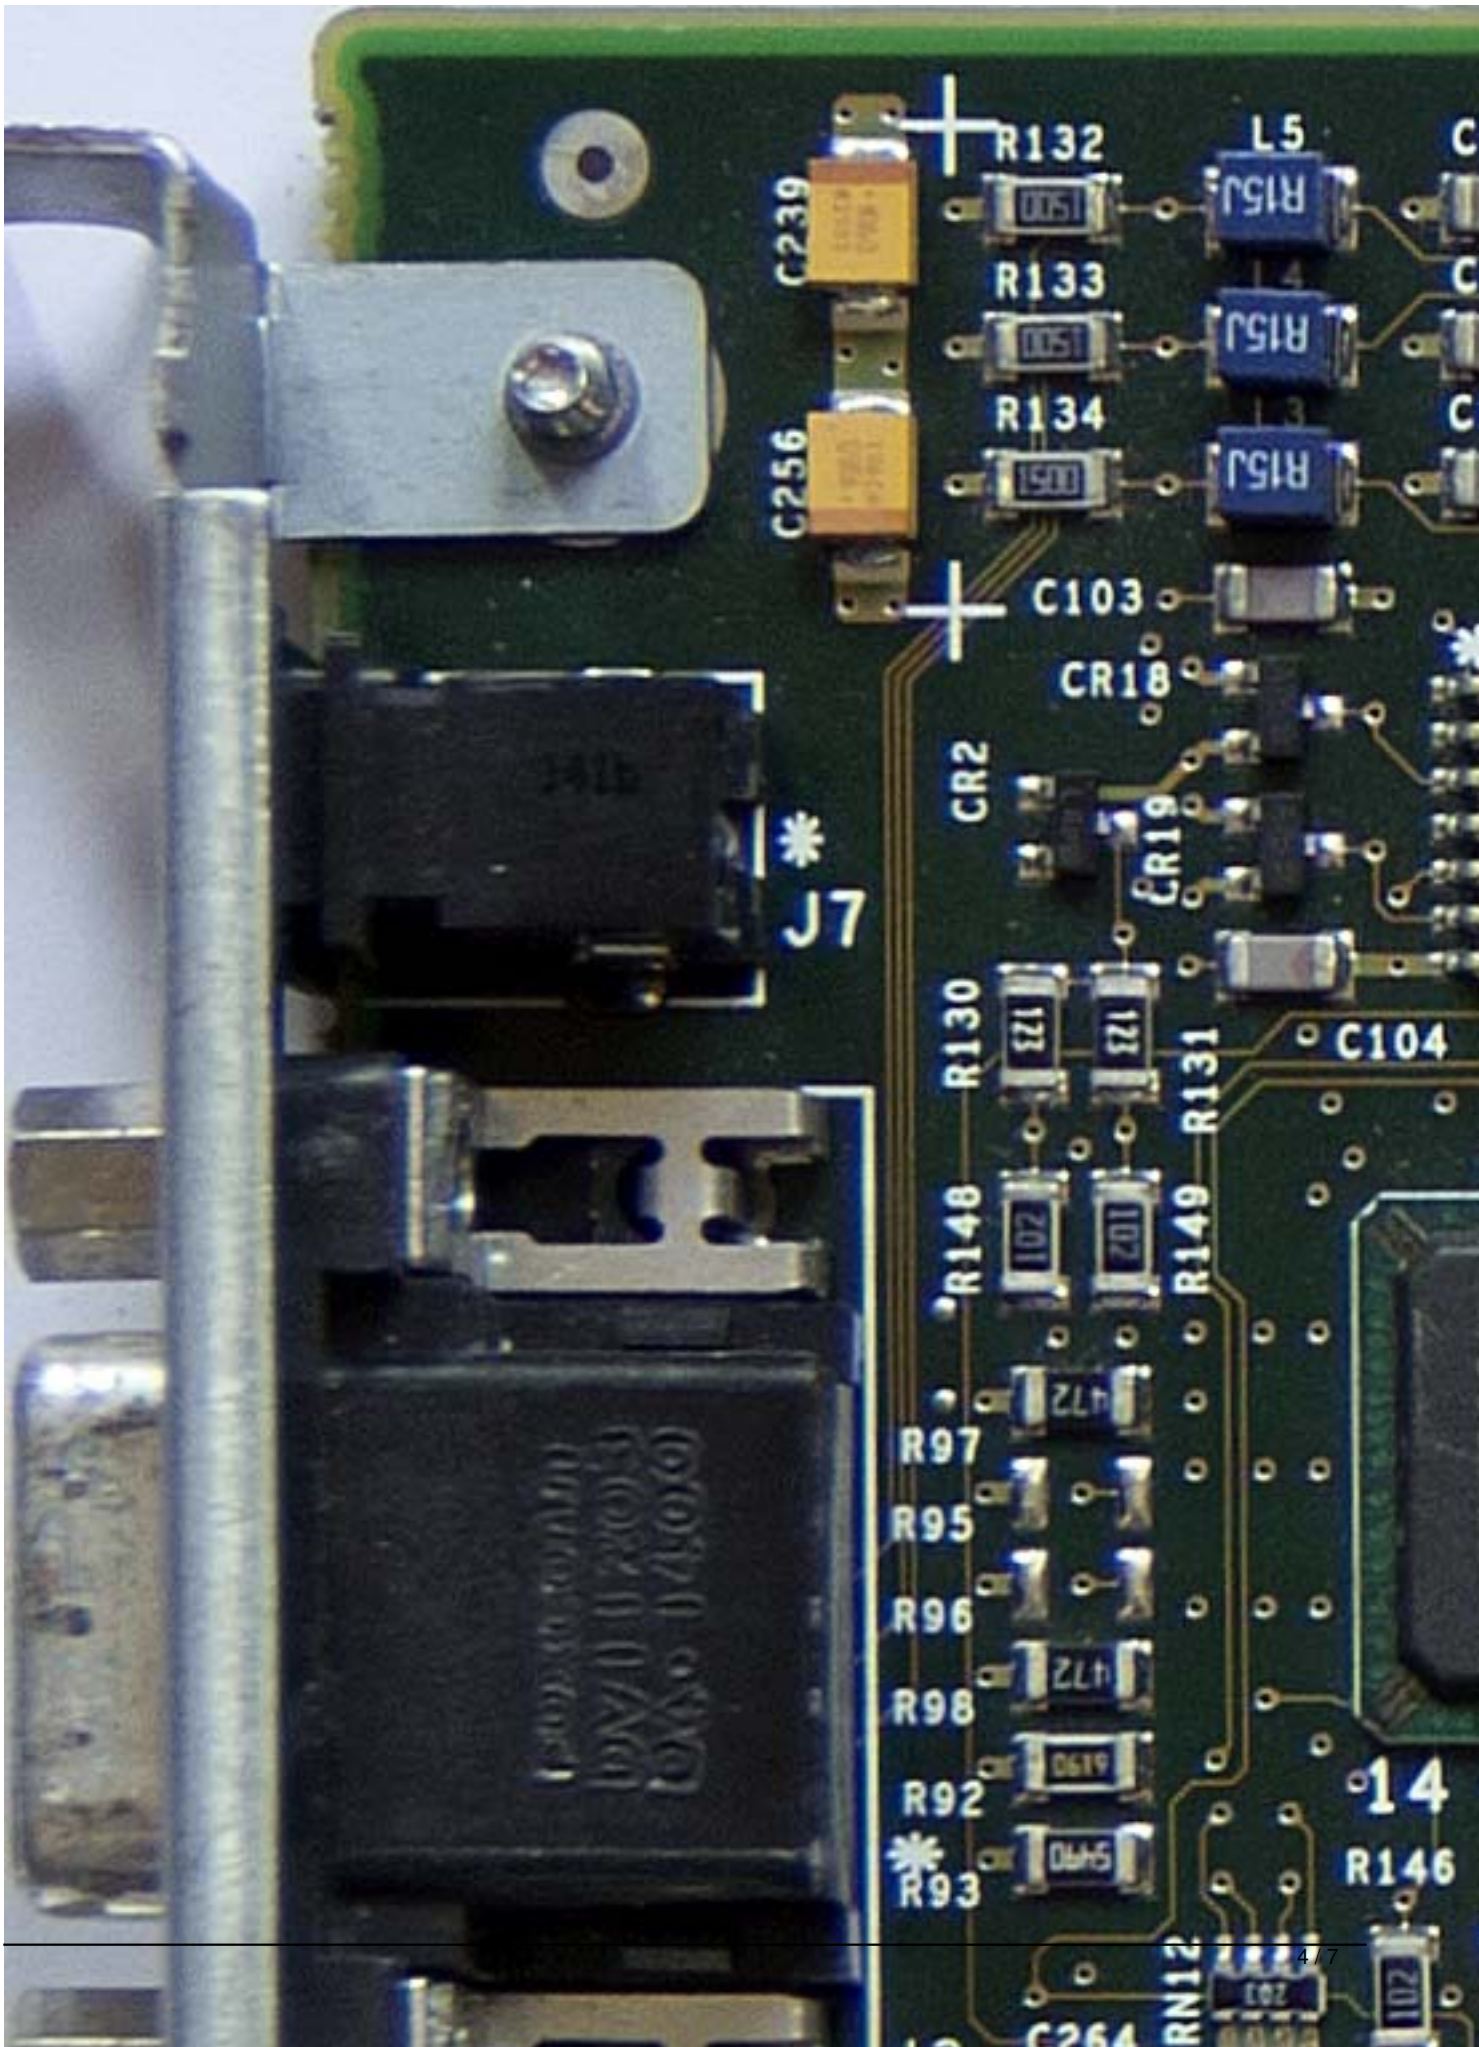
R132
L5
C239
R133
R134
C256
C103
CR18
CR2
CR19
J7
R130
R131
C104
R148
R149
R97
R95
R96
R98
R92
R93
14
R146

94V-0
Agency S
Complies

{/webgallery}