Core: RV380 500MHz ?bit
Memory: 128MB DDR 700MHz 128bit
Year: 2004 **Bus:** PCI-E 16x
Made: TSMC 130nm **Links:** Guru3D Opengl

Note: HIS card is clocked to 513MHz core and 702MHz memory

{webgallery}

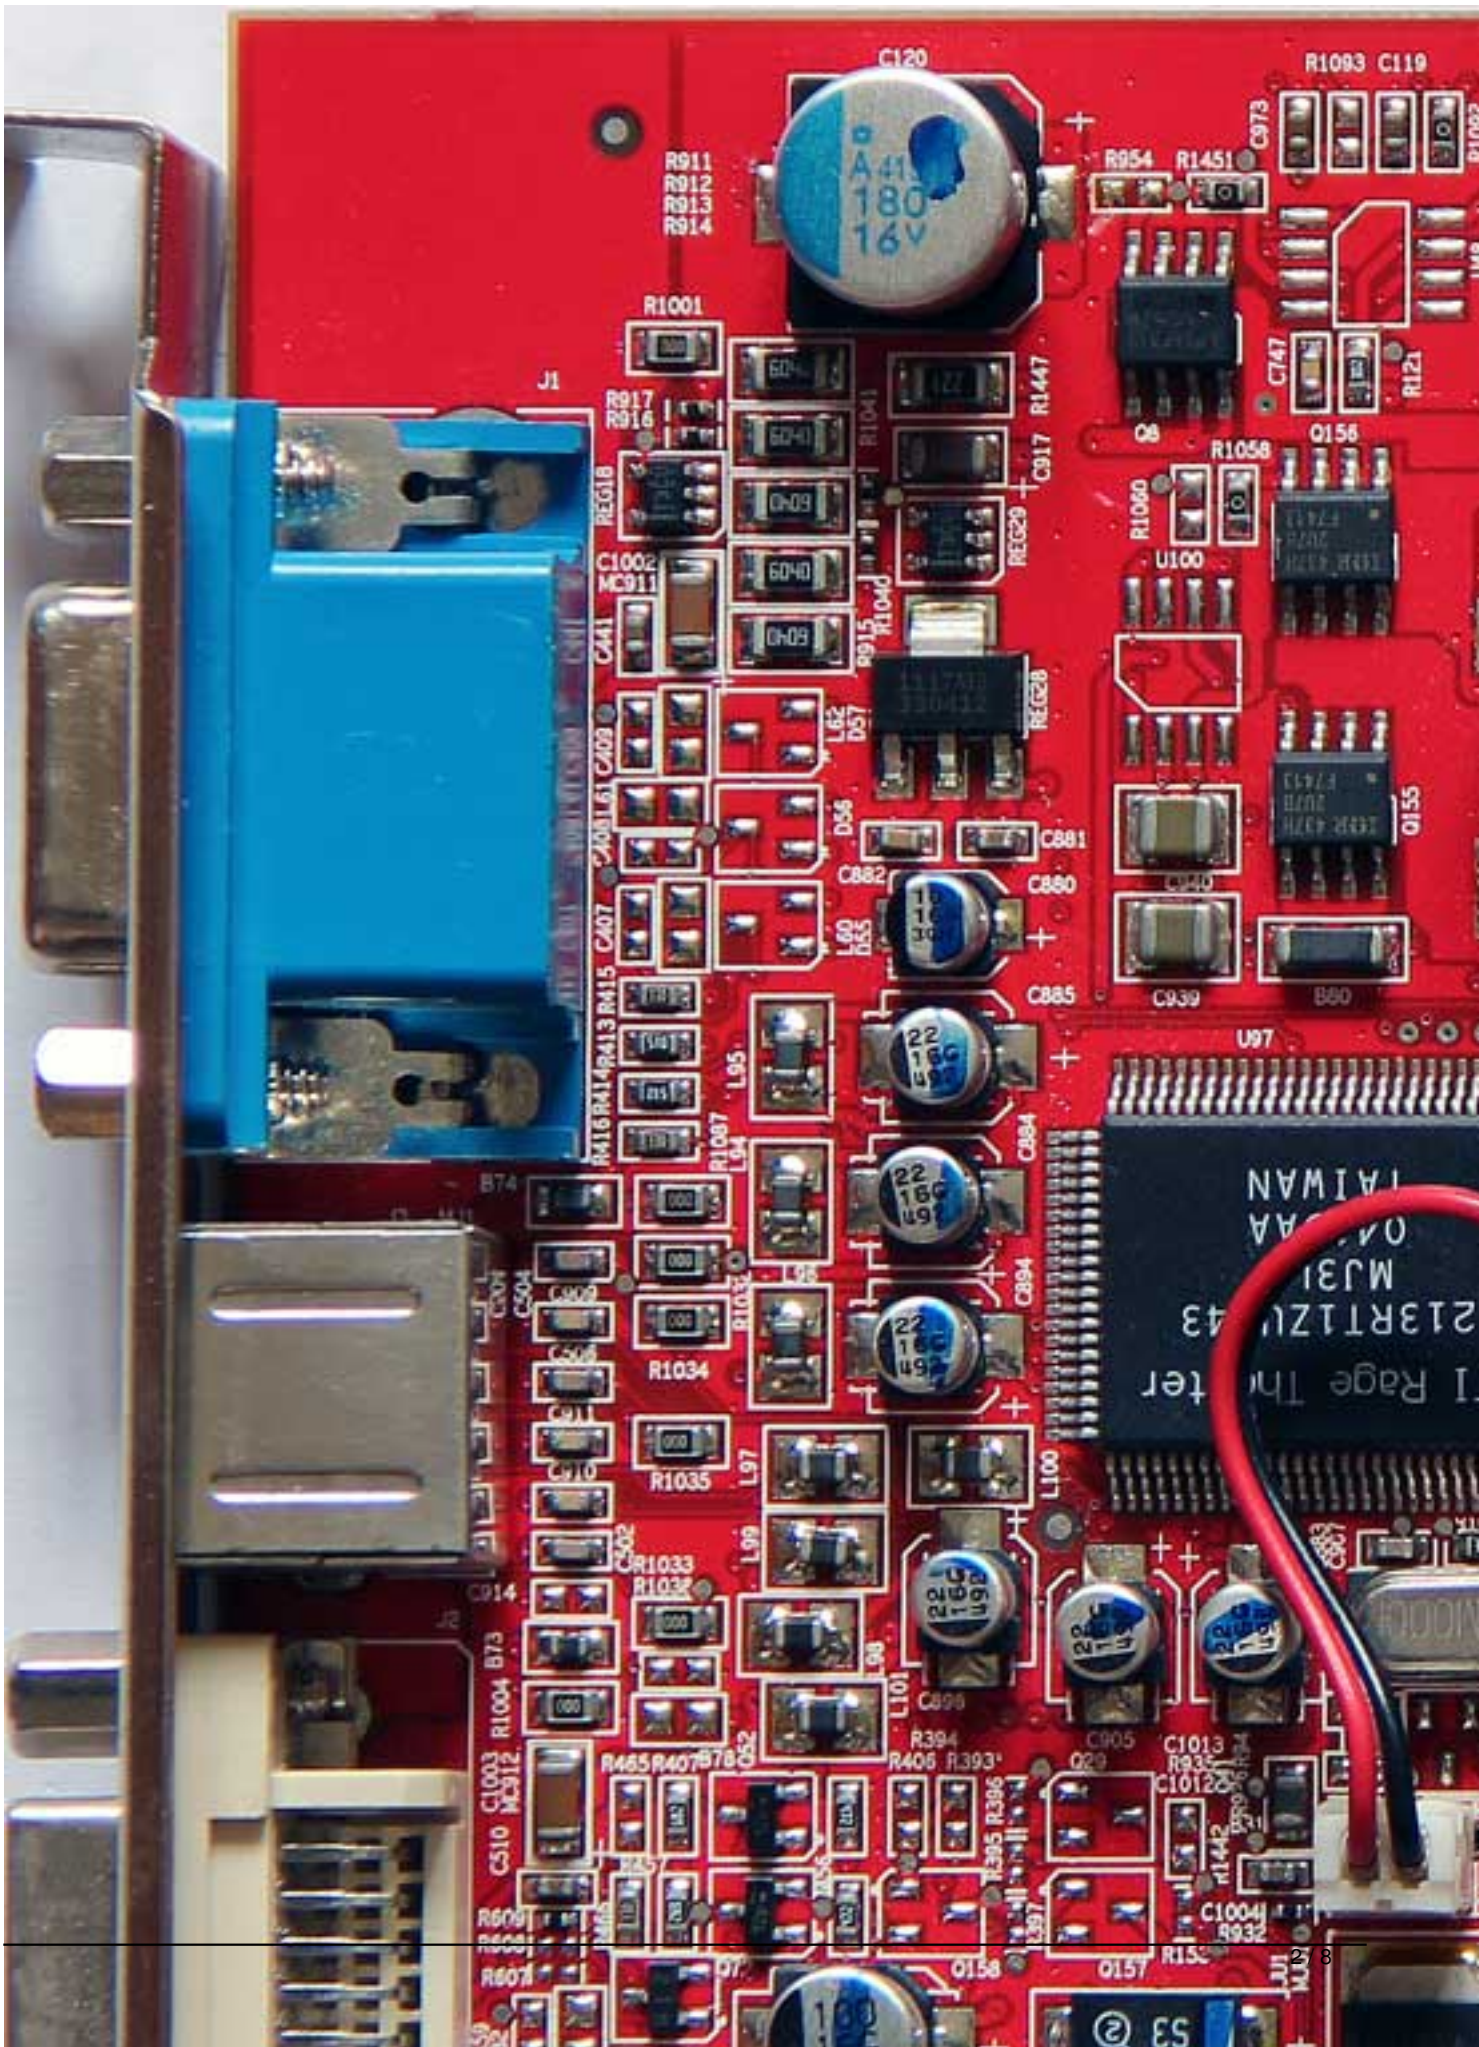
C120
R911
R912
R913
R914
R1001
R1093
C119
R954
R1451
C973
C747
R121
Q156
R1058
R1060
U100
J1
R917
R916
REG18
C1002
MC911
C441
R915
R1041
R1447
C917
REG29
REG28
L62
DS7
C409
C407
D56
C881
C882
C880
C885
C939
B80
Q155
U97
L95
L94
C884
C894
R1034
R1035
L97
L99
L100
L101
C898
C905
C1013
R394
R405
R393*
R465
R407
C1003
MC912
C310
R1004
B73
C914
R1033
R1032
C910
C911
C909
C504
C502
R1087
R1032
R415
R414
R413
R416
B74
J2
Q158
Q157
C1004
R932
S3

Complies with Canadian
ICES-003, Class B
Radeon X600
P/N 99

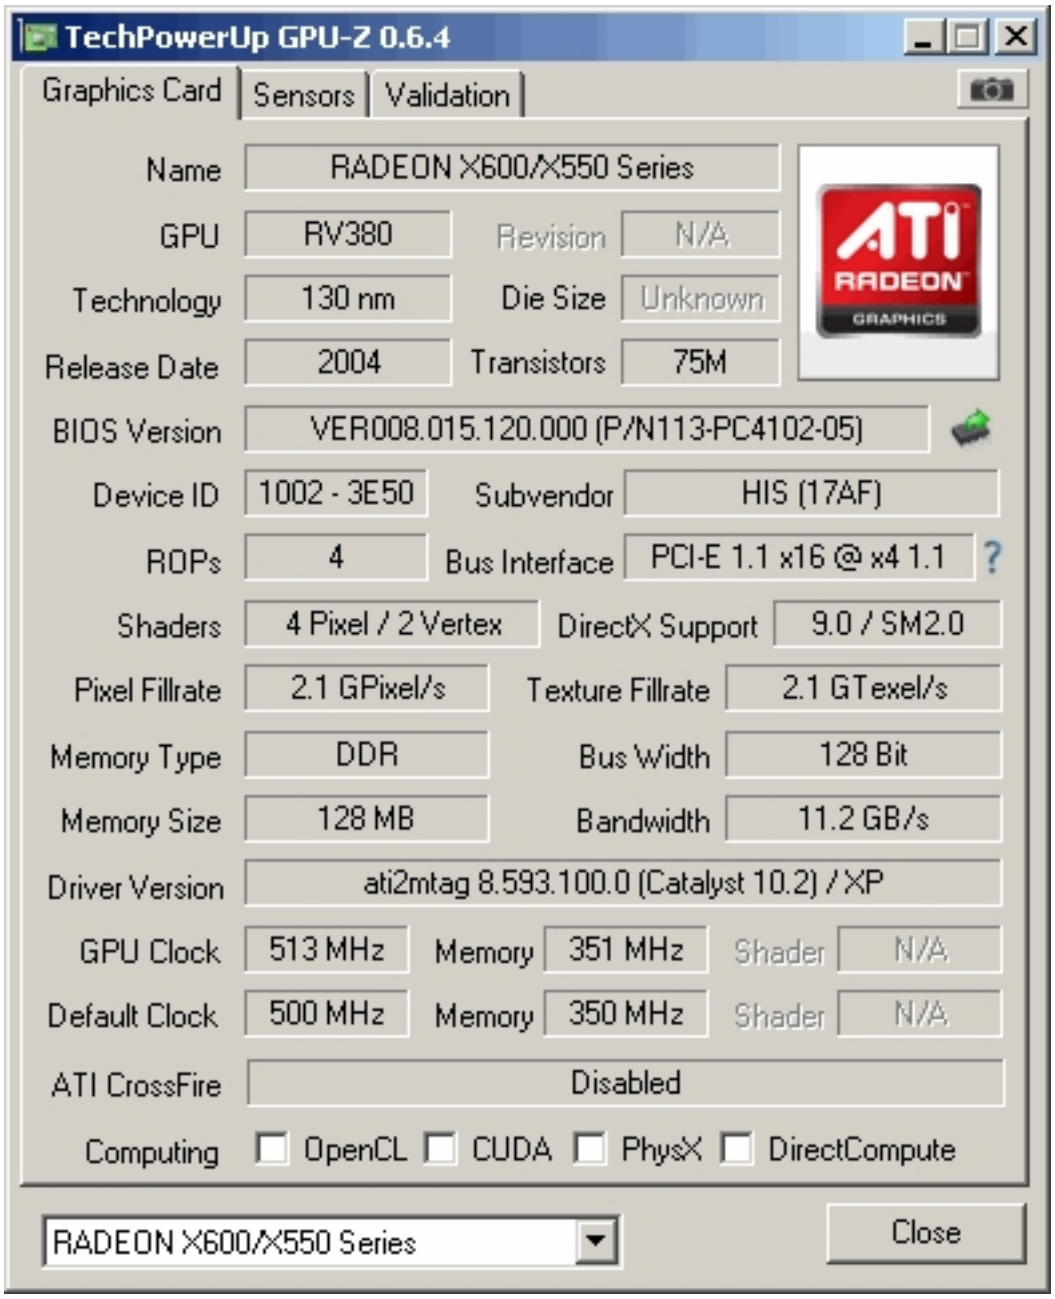
TechPowerUp GPU-Z 0.6.4
Graphics Card
Sensors
Validation
Name
RADEON X600/X550 Series
GPU
RV380
Revision
N/A
Technology
130 nm
Die Size
Unknown
Release Date
2004
Transistors
75M
BIOS Version
VER008.015.120.000 (P/N113-PC4102-05)
Device ID
1002 - 3E50
Subvendor
HIS (17AF)
ROPs
4
Bus Interface
PCI-E 1.1 x16 @ x4 1.1
Shaders
4 Pixel / 2 Vertex
DirectX Support
9.0 / SM2.0
Pixel Fillrate
2.1 GPixel/s
Texture Fillrate
2.1 GTexel/s
Memory Type
DDR
Bus Width
128 Bit
Memory Size
128 MB
Bandwidth
11.2 GB/s
Driver Version
ati2mtag 8.593.100.0 (Catalyst 10.2) / XP
GPU Clock
513 MHz
Memory
351 MHz
Shader
N/A
Default Clock
500 MHz
Memory
350 MHz
Shader
N/A
ATI CrossFire
Disabled
Computing
OpenCL
CUDA
PhysX
DirectCompute
RADEON X600/X550 Series
Close

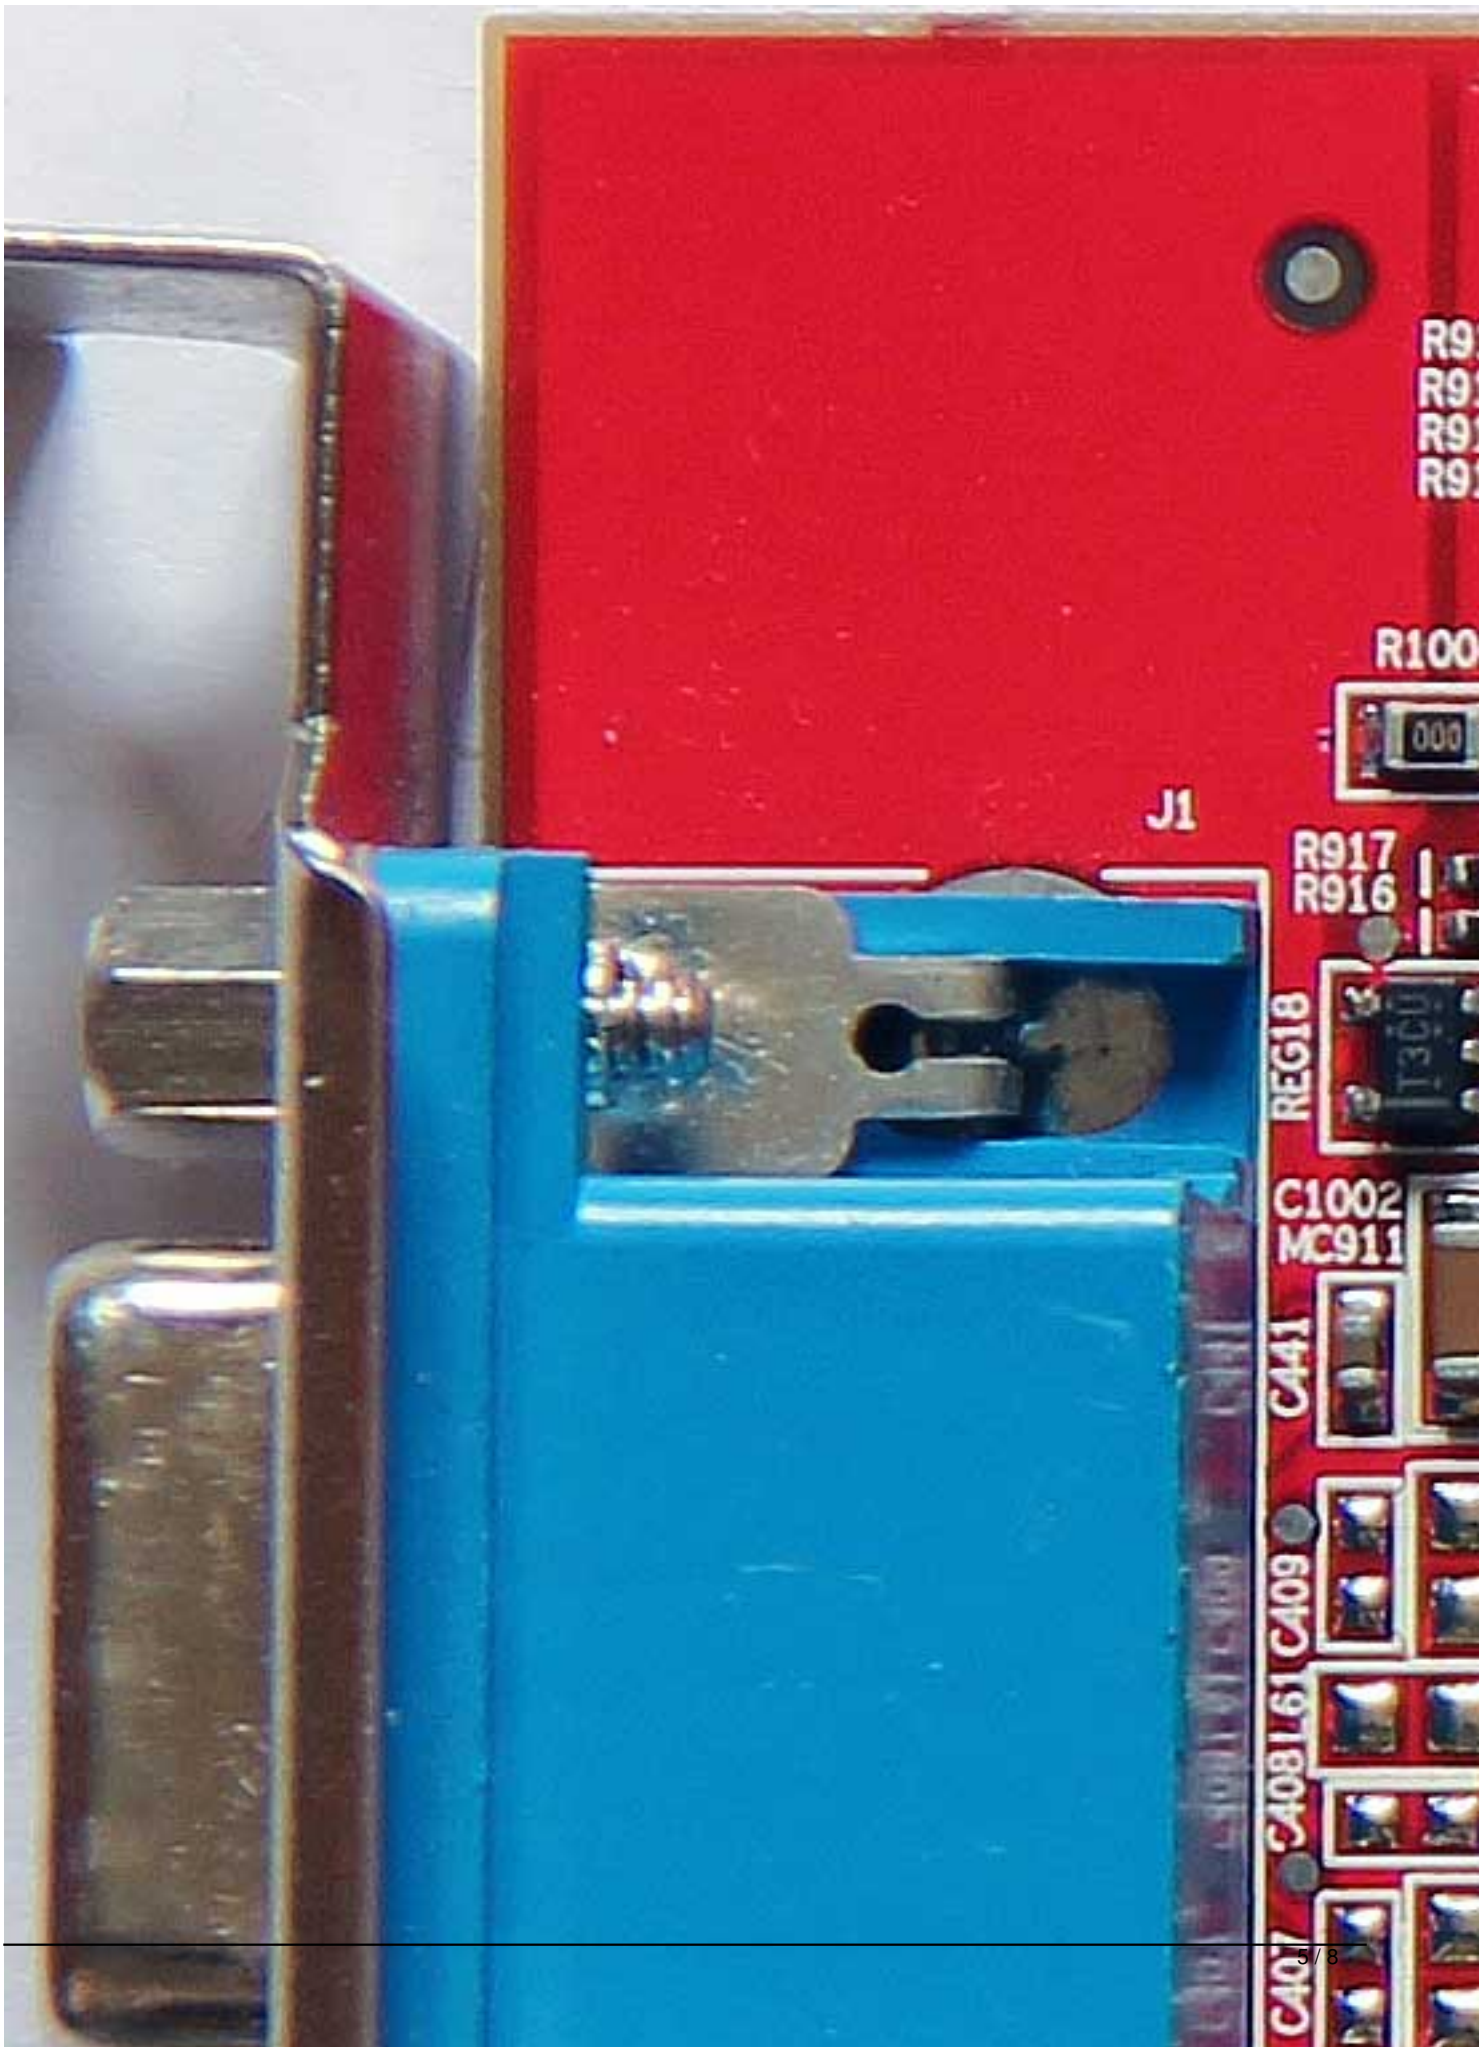
R100
J1
R917
R916
REG18
C1002
MC911
C41
C409
C408
L61
C407

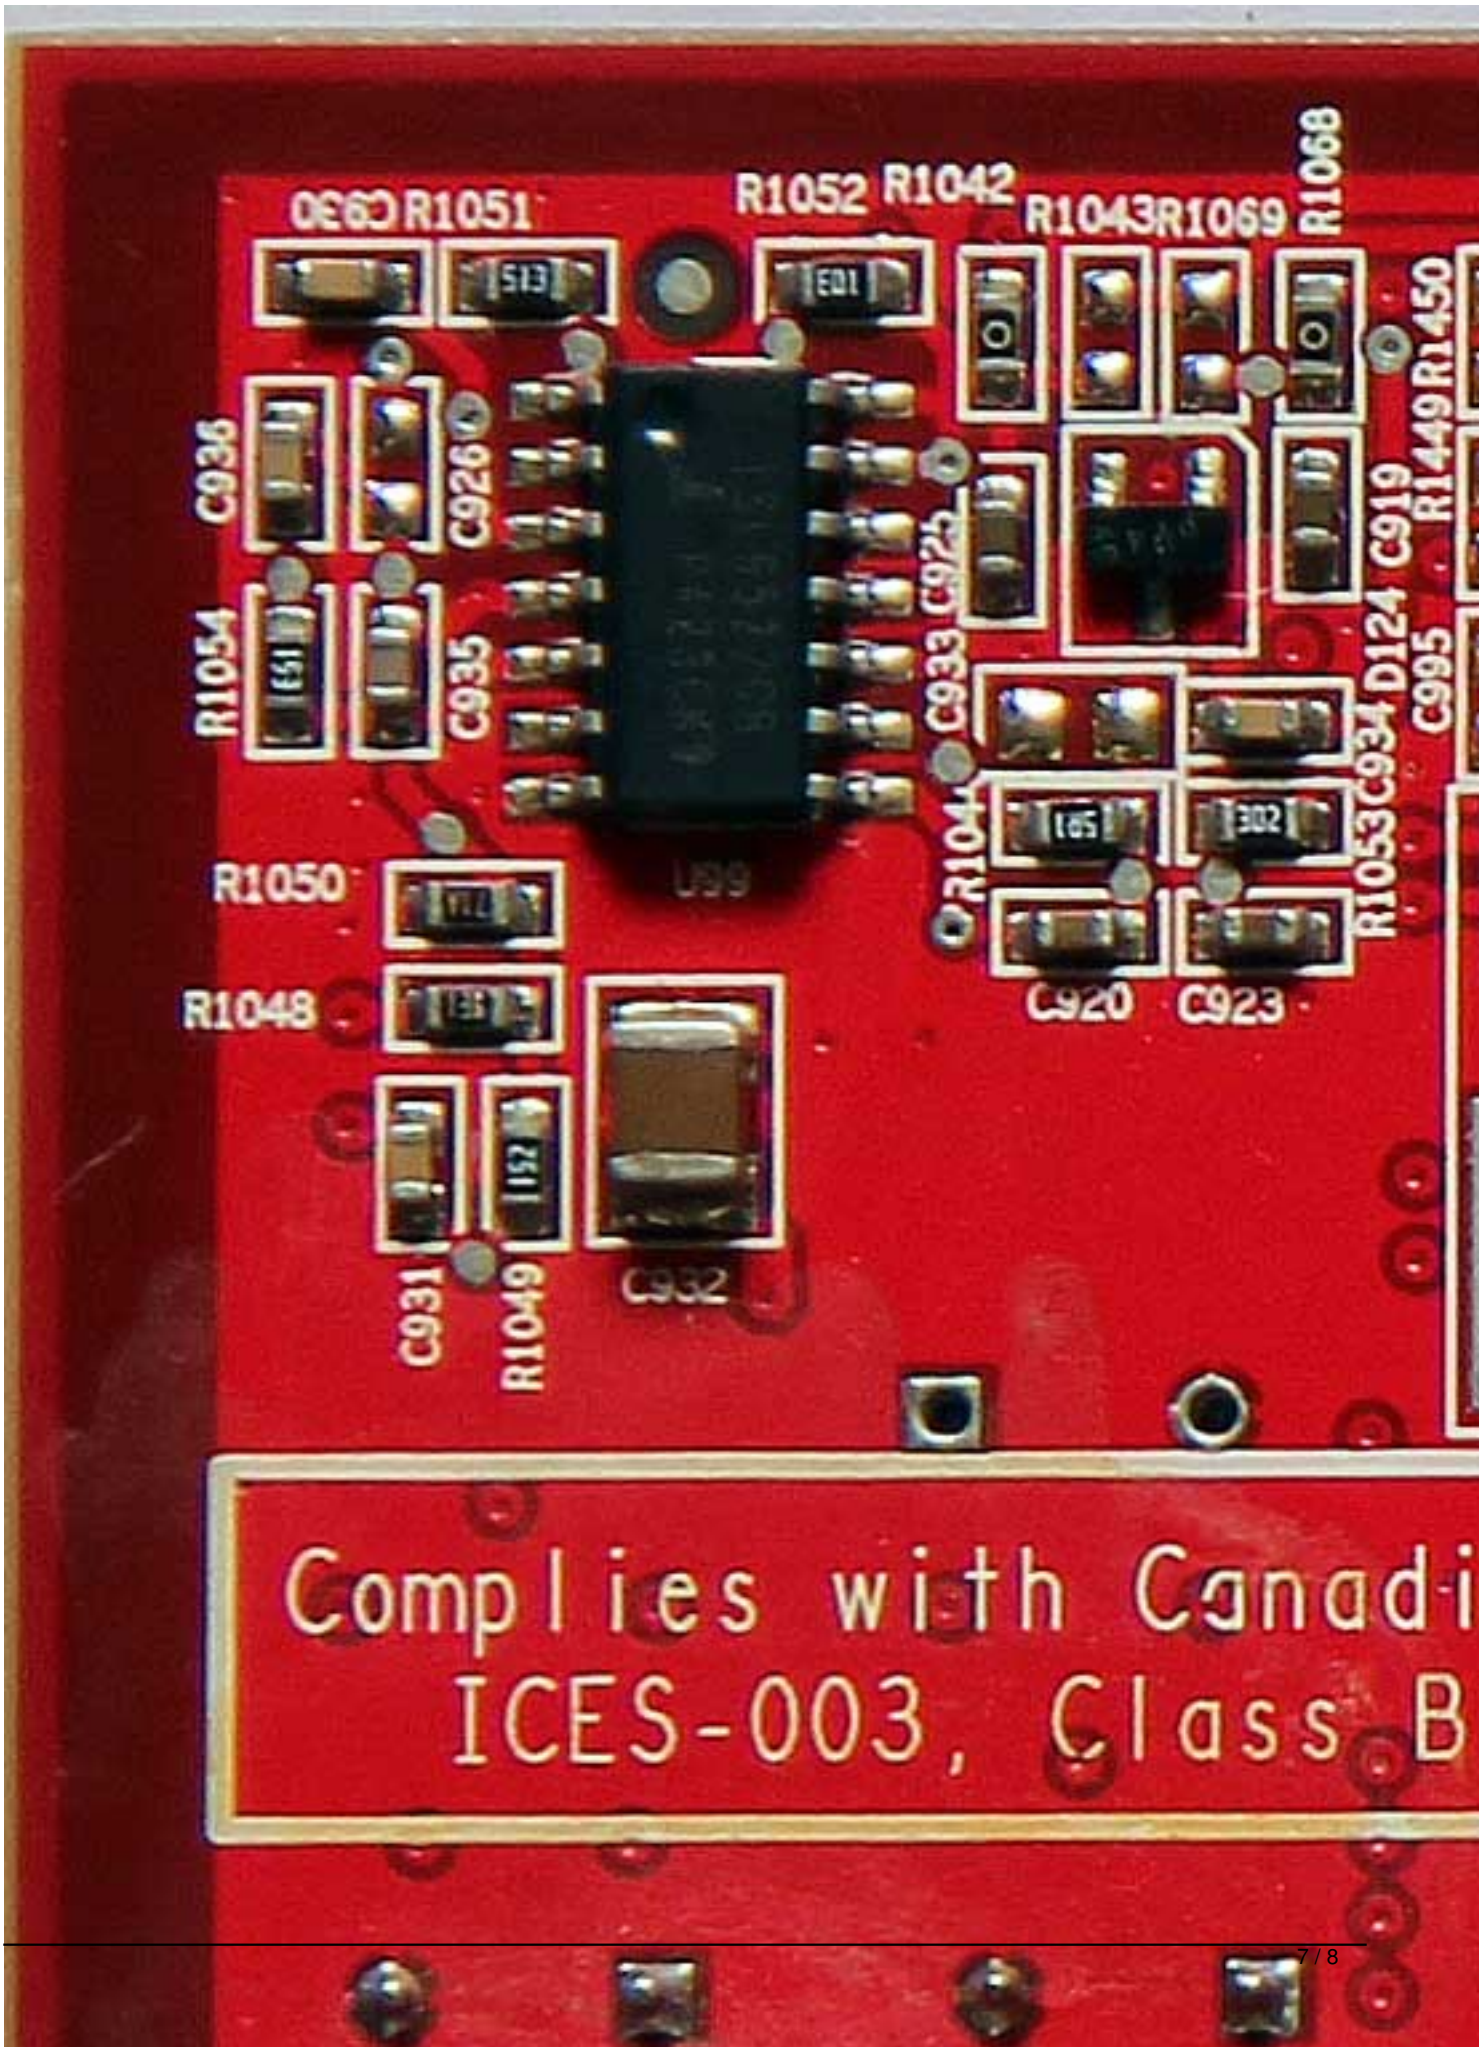
R1051
R1052
R1042
R1043
R1069
R1068
R1450
R1449
C919
D124
C995
C926
C925
C933
C934
R1053
C920
C923
R1054
C935
R1050
R1048
C931
R1049
C932
Complies with Canadi
ICES-003, Class B

{/webgallery}