


Core: RV530 500MHz 256bit Memory: 256MB DDR2 584MHz 128bit Year: 2005 Bus: AGP 8x / PCI-E 16x Made: TSMC 90nm Links: <u>Sapphire</u> <u>Tom's HW</u> <u>Legit</u> <u>OpenGL</u>


Bios: <u>Sapphire</u>

{webgallery}

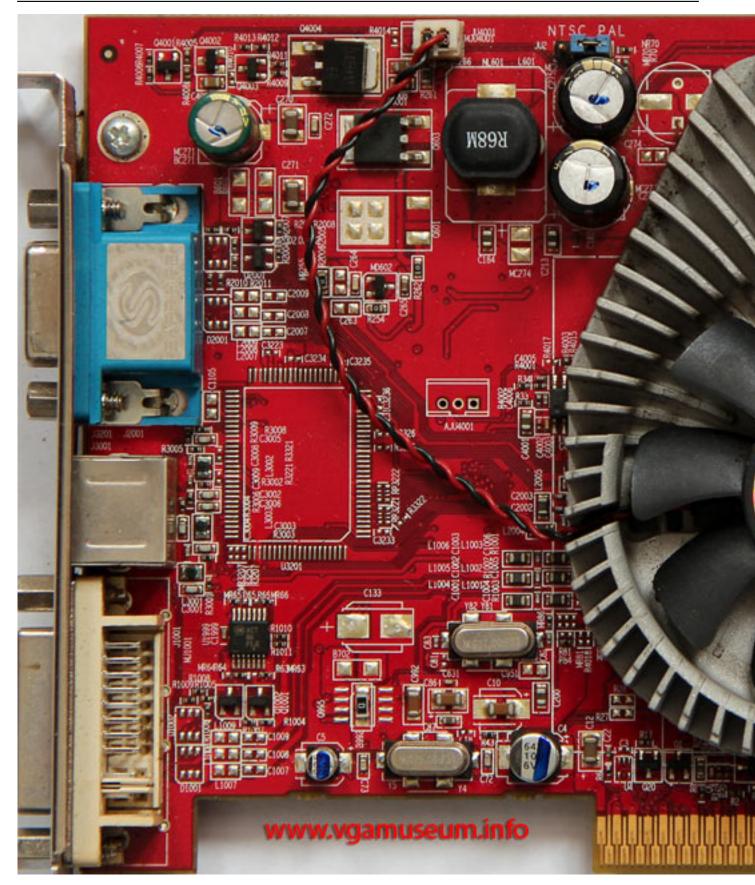


Written by Vlask


Tuesday, 11 December 2012 23:46 - Last Updated Monday, 06 May 2013 22:44

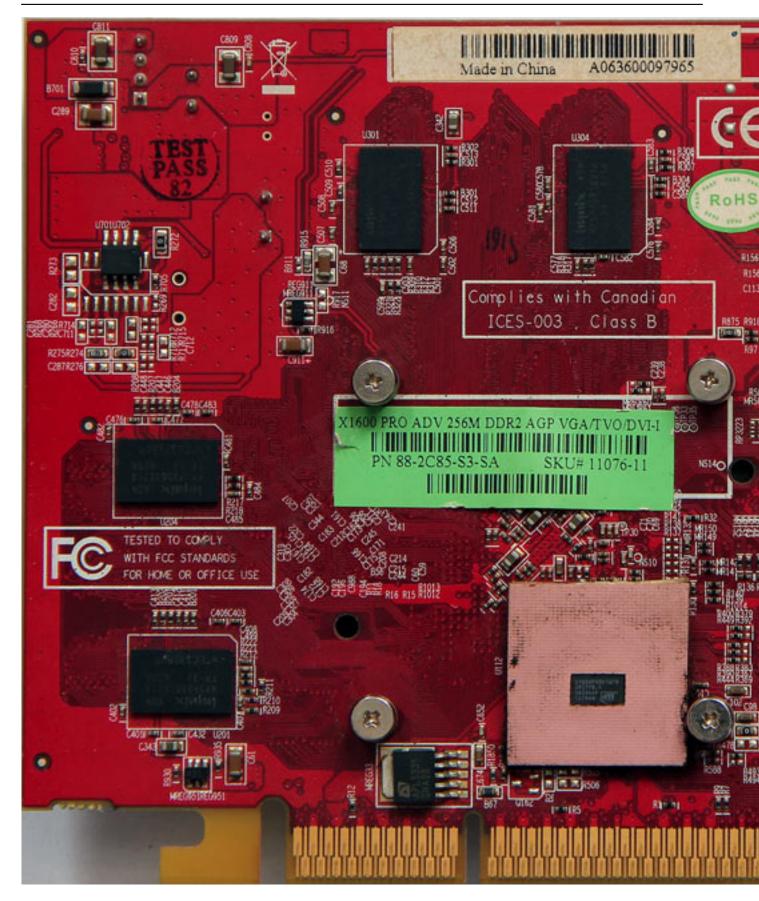


Written by Vlask


Tuesday, 11 December 2012 23:46 - Last Updated Monday, 06 May 2013 22:44

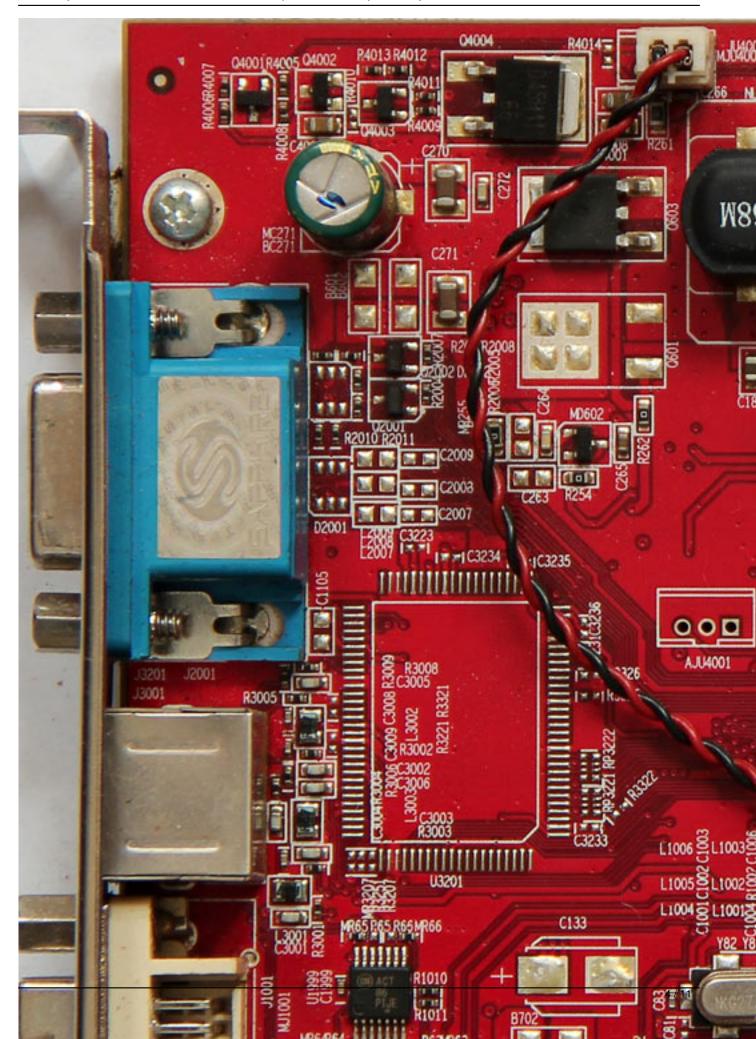

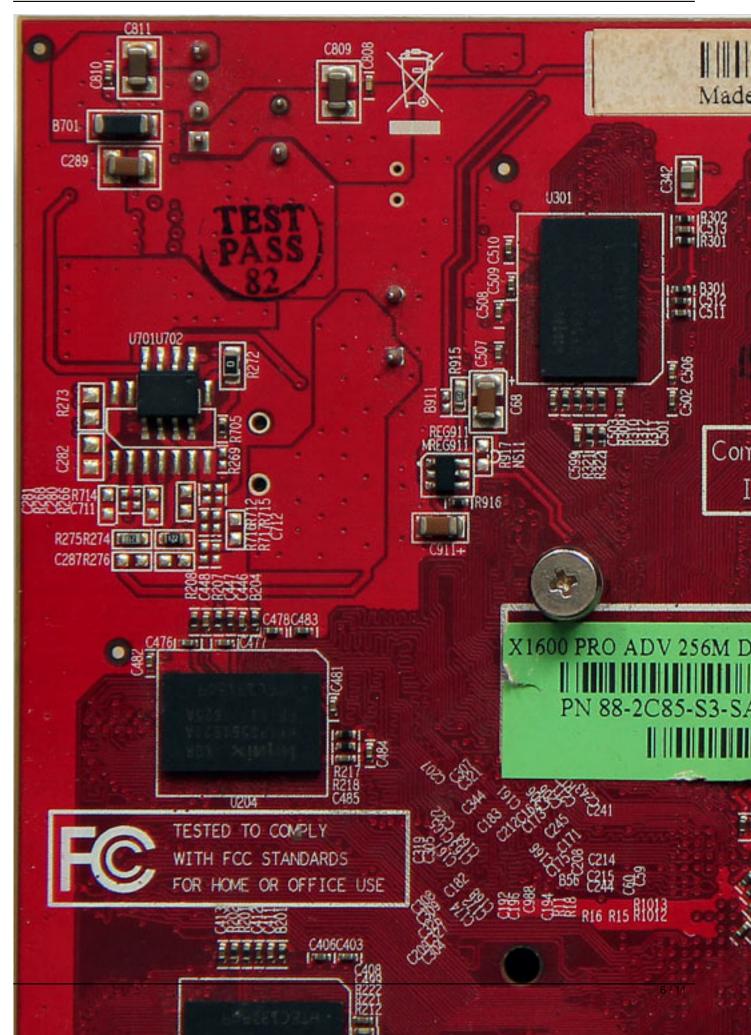

📴 TechPowerUp GPU-Z 0.4.6			
Graphics Card	Sensors Valida	ation MSI Giveaway	101
Name	Radeon X <sup>*</sup>	1600/X1650 Series	
GPU	RV530	Revision N/A	ATÎ
Technology	90 nm	Die Size 150 mm	
Release Date	2006	Transistors 157M	
BIOS Version	00	9.012.012.002.020282	1
Device ID	1002 - 71C2	Subvendor Sapphire/PCPar	rtner (174B)
ROPs	4 E	Bus Interface AGP 4x @	<u>م</u> 4x
Shaders	12 Pixel / 5 Vertex DirectX Support 9.0c / SM3.0		
Pixel Fillrate	2.0 GPixel/s Texture Fillrate 2.0 GTexel/s		iTexel/s
Memory Type	DDR2	Bus Width 12	28 Bit
Memory Size	256 MB	Bandwidth 9.4	GB/s
Driver Version	ati2mtag 8.593.100.0 (Catalyst 10.2) / XP		
GPU Clock	500 MHz M	emory 293 MHz Shader	
Default Clock	500 MHz M	emory 300 MHz Shader	
ATI CrossFire	Disabled		
Computing 🔲 OpenCL 🔲 CUDA 🔲 PhysX 🗔 DirectCompute			
Radeon X1600/X1650 Series Close			

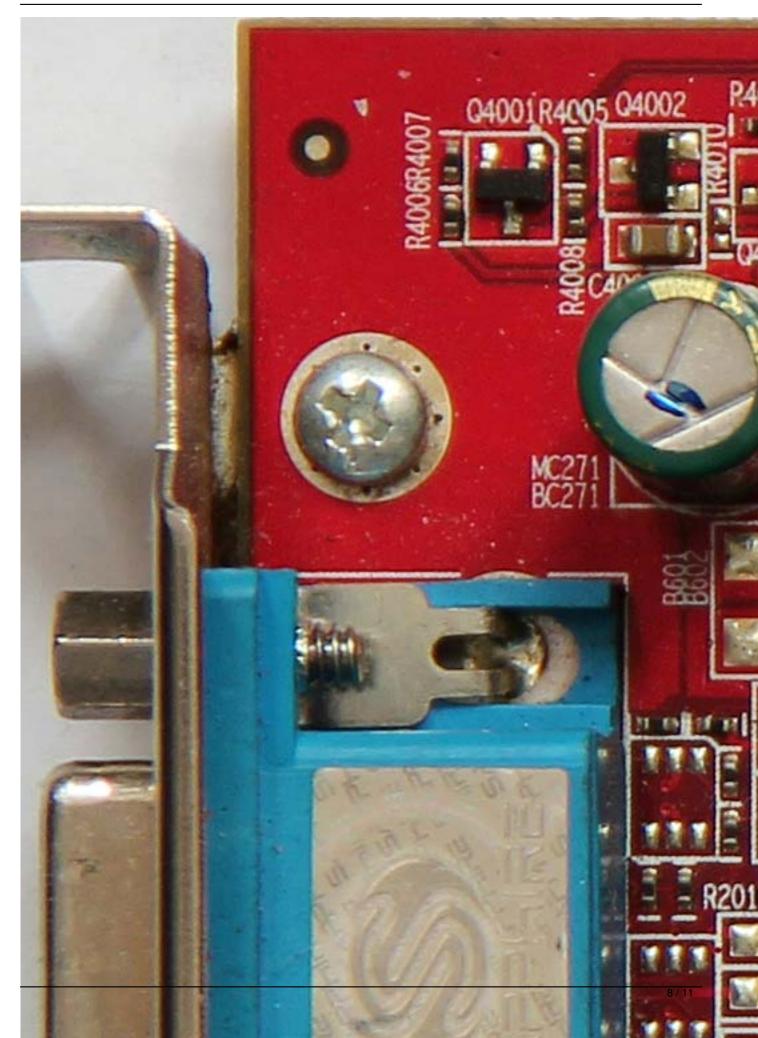

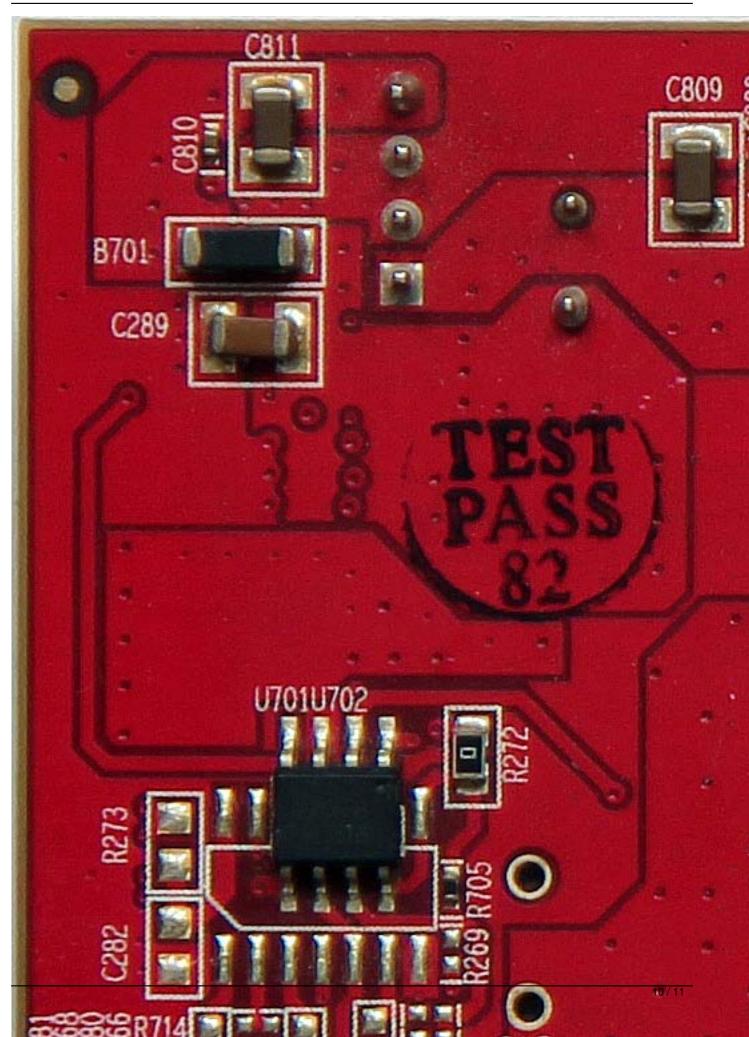

Written by Vlask Tuesday, 11 December 2012 23:46 - Last Updated Monday, 06 May 2013 22:44

{/webgallery}