Written by Vlask

Saturday, 14 September 2013 20:08 - Last Updated Saturday, 14 September 2013 20:49



Core: ATI 3D Rage IIC PCI ?MHz 64bit

Memory: 4MB SDRAM ?MHz ?bit

Year: 2000 Bus: PCI


Made: Taiwan Links: Linuxmanual HP info

Bios: here

Note: remote control card for Compaq ProLiant servers. With external power adapter (optional, works without it) can work even with powered down server. Card has raid type bios (loads at boot before os), where can be set lan parameters, user names, passwords and management rights.

{webgallery}

Saturday, 14 September 2013 20:08 - Last Updated Saturday, 14 September 2013 20:49

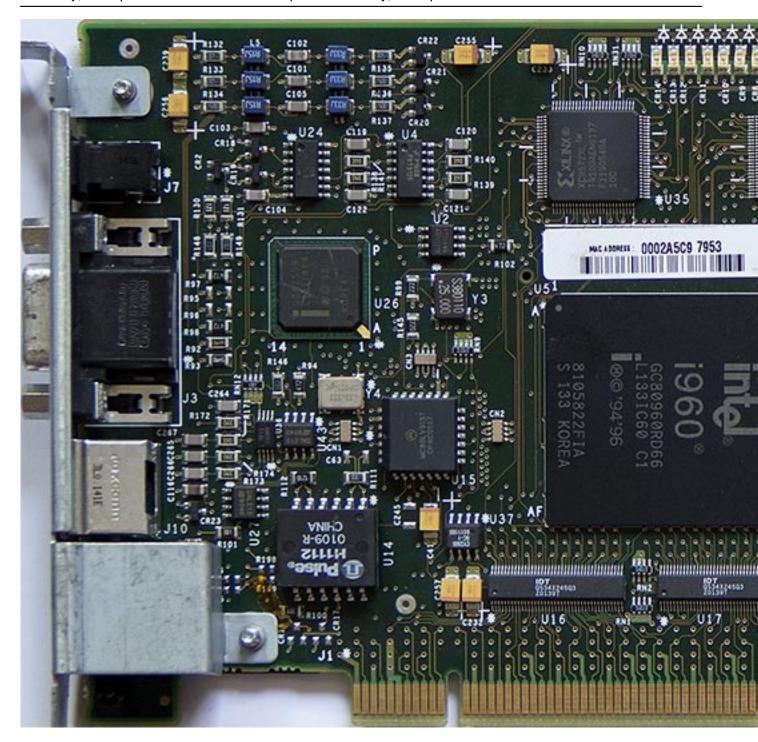


Written by Vlask

Saturday, 14 September 2013 20:08 - Last Updated Saturday, 14 September 2013 20:49




Written by Vlask Saturday, 14 September 2013 20:08 - Last Updated Saturday, 14 September 2013 20:49

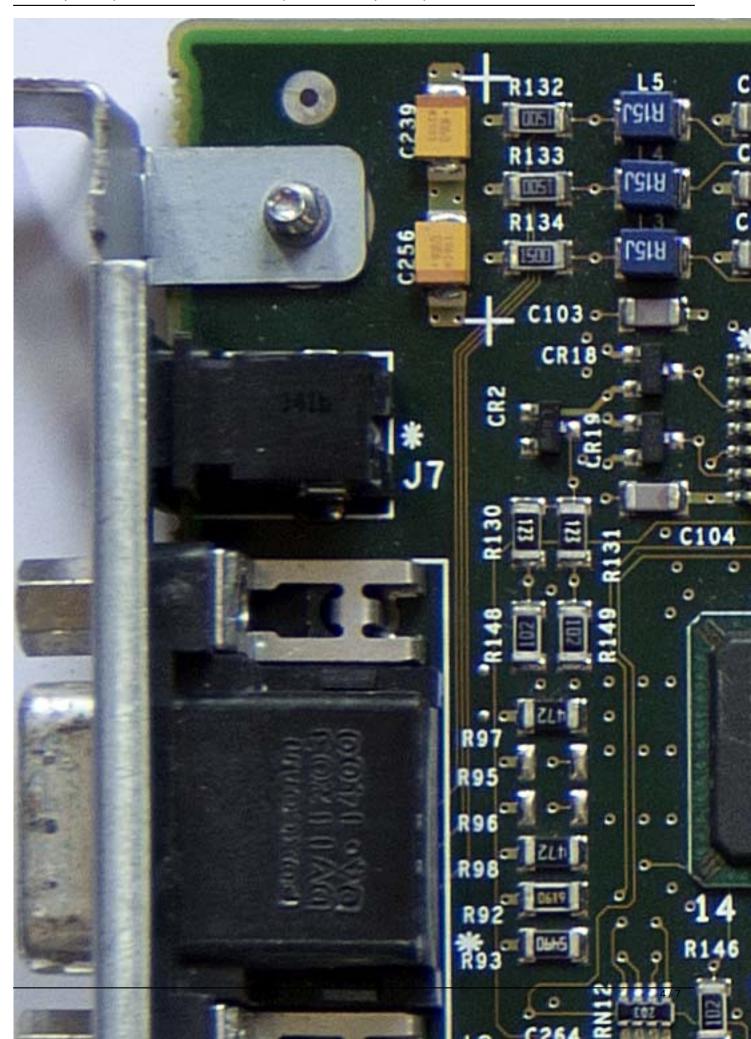

Written by Vlask

Saturday, 14 September 2013 20:08 - Last Updated Saturday, 14 September 2013 20:49

Written by Vlask Saturday, 14 September 2013 20:08 - Last Updated Saturday, 14 September 2013 20:49

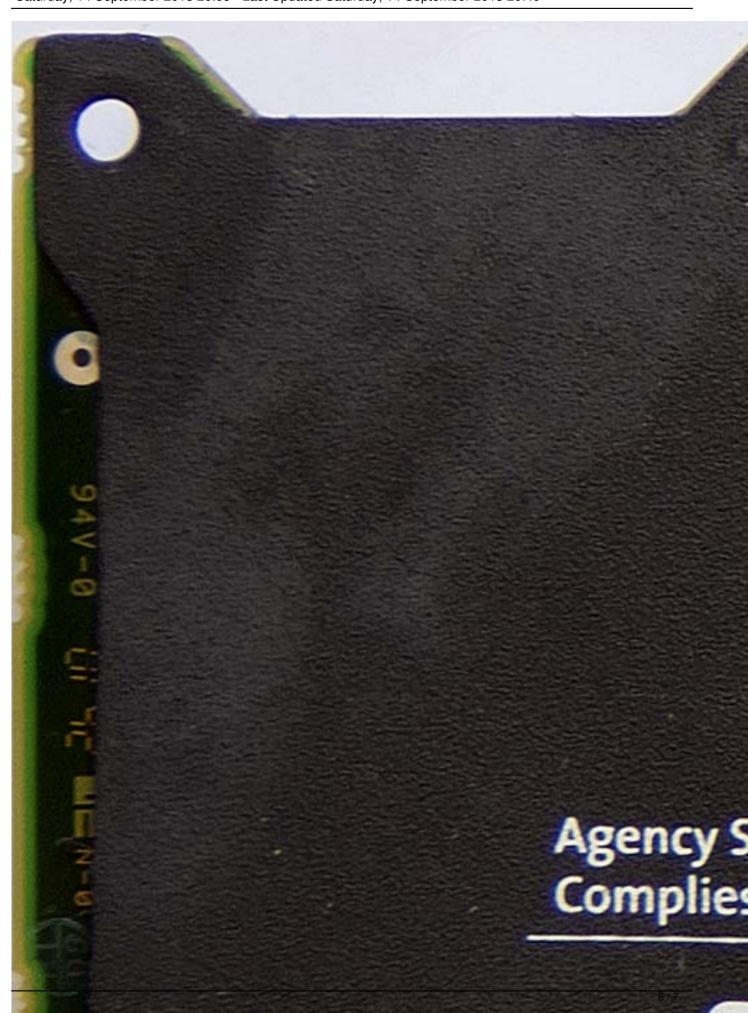

Written by Vlask Saturday, 14 September 2013 20:08 - Last Updated Saturday, 14 September 2013 20:49

{/webgallery}